


Hydraulic-Tablepress

HT-0160

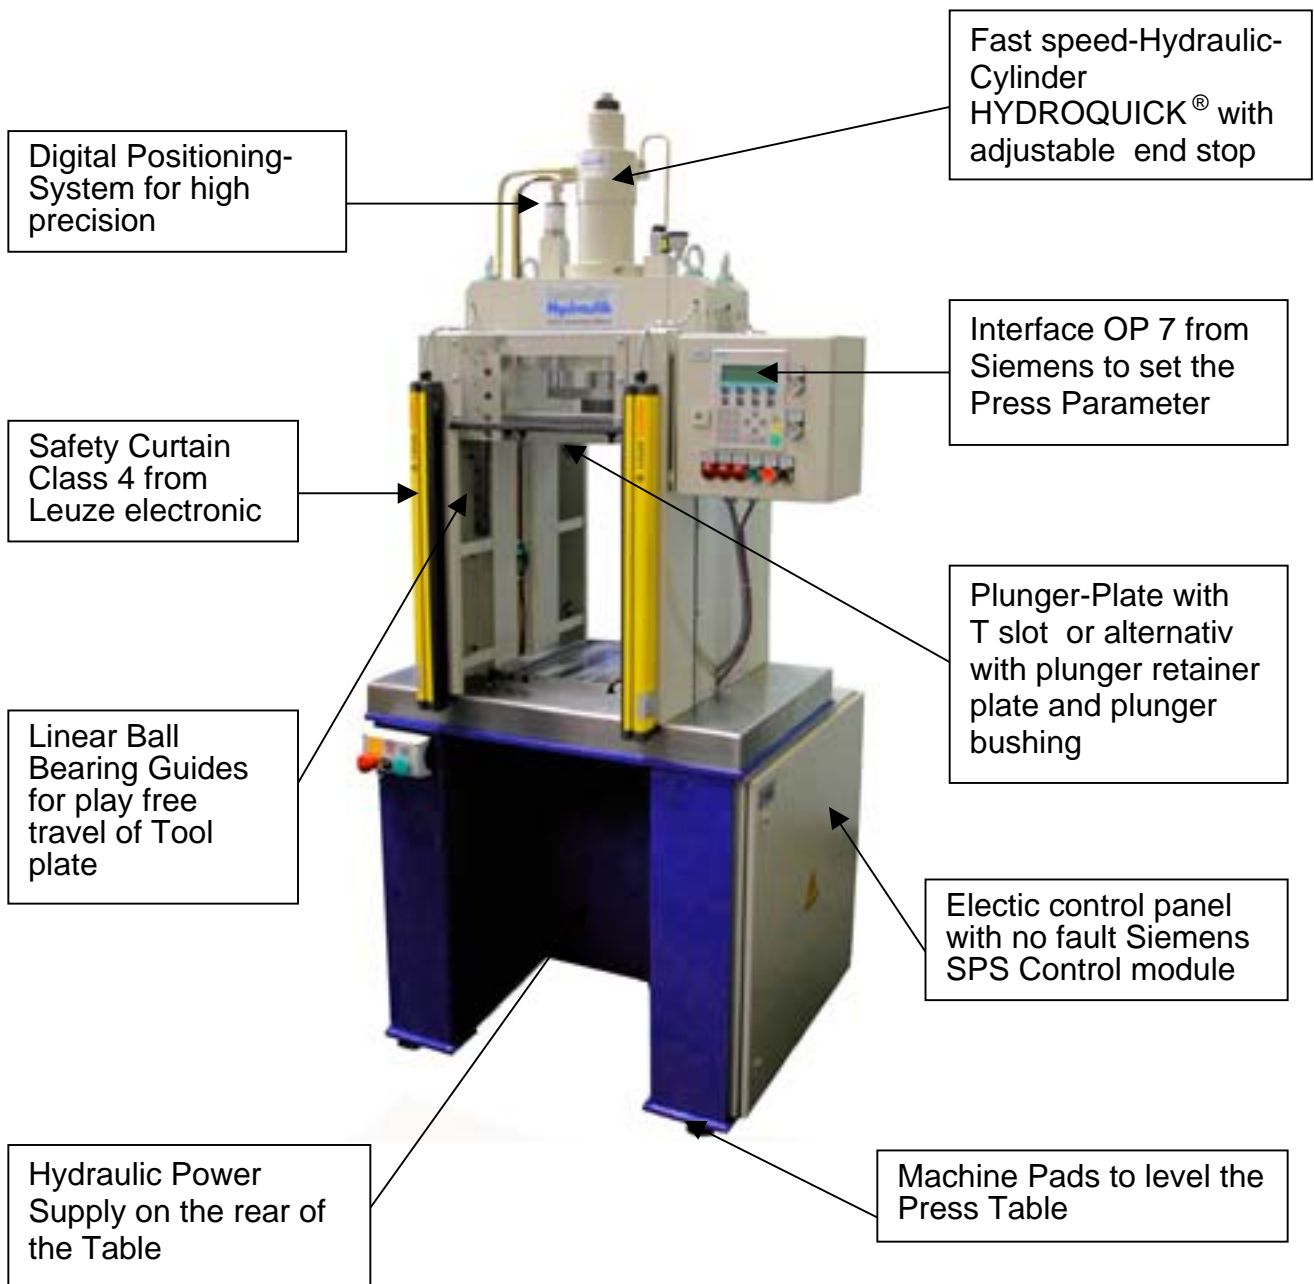

Description:

Steel frame table with screwed-on rigid steel press frame, HYDROQUICK® – Quick stroke Cylinder, with plunger retainer plate and plunger bushing, linear ball bearing guides and digital positioning system. No fault Siemens SPS control module.

The switch point for fast speed, work stroke and fast reverse as well as pressure and speed are separate saved as needed for operator- und automatic mode.

Dynamic optimized movement of the plunger.

Low noise power unit because of small gear pump.

The Press can be integrated in existing Workflow or as single place solution with light curtain or two hand operator.

Utilization: Punching. Bending. Deep drawing.. Riveting. .

Tool installation dimensions and speed:

Press force:	160 kN
Stroke:.....	200 mm
Table width:.....	400 mm
Table depth:	350 mm
Installation height:	500 mm
Fast travel speed:.....	180 mm/s
Work speed:	28 mm/s

Dimension and Weight

Height:.....	2175 mm
Width:	911 mm
Depth:.....	850 mm
Weight:	995 kg